


# 3.072Gb/s SFP BIDI Transceiver

APSB35303xxL20



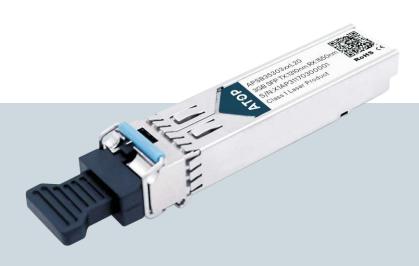

## 3.072Gb/s SFP BIDI Transceiver

#### APSB35303xxL20

#### **Product Features Applications** √ Wireless – CPRI, OBSAI ✓ Up to 3.072Gb/s data links √ Single LC connector √ Hot-pluggable SFP footprint √ 1310nm DFB laser transmitter √ RoHS compliant and Lead Free ✓ Up to 20Km on 9/125um SMF ✓ Metal enclosure for lower EMI ✓ Single +3.3V power supply ✓ Power dissipation <800mW (0~70°C), <1000mW (-40~85°C) √ Commercial and industrial operating temperature optional ✓ SFP MSA SFF-8074i Compliant

#### **Product Selection**

Part Number	Operating temperature	DDMI
APSB35303CXL20	Commercial	No
APSB35303CDL20	Commercial	Yes
APSB35303IXL20	Industrial	No
APSB35303IDL20	Industrial	Yes

### **Regulatory Compliance**

- ESD to the Electrical PINs: compatible with MIL-STD-883 Method 3015
- ESD to the Duplex LC Receptacle: compatible with IEC 61000-4-2
- Immunity compatible with IEC 61000-4-3
- EMI compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2
- RoHS compliant with RoHS 2 (2011/65/EU)




#### **Pin Descriptions**

1 VeeT Transmitter Ground Common with Receiver Ground)   2 TX Fault Transmitter Fault.   3 TX Disable Transmitter Disable. Laser output disabled on high or open.	2
	2
3 TX Disable Transmitter Disable. Laser output disabled on high or open.	2
4 MOD_DEF(2) Module Definition 2. Data line for Serial ID.	3
5 MOD_DEF(1) Module Definition 1. Clock line for Serial ID.	3
6 MOD_DEF(0) Module Definition 0. Grounded within the module.	3
7 Rate Select No connection required	
8 LOS Loss of Signal indication. Logic 0 indicates normal operation.	4
9 VeeR Receiver Ground (Common with Transmitter Ground)	1
10 VeeR Receiver Ground (Common with Transmitter Ground)	1
11 VeeR Receiver Ground (Common with Transmitter Ground)	1
12 RD- Receiver Inverted DATA out. AC Coupled	
13 RD+ Receiver Non-inverted DATA out. AC Coupled	
14 VeeR Receiver Ground (Common with Transmitter Ground)	1
15 VccR Receiver Power Supply	
16 VccT Transmitter Power Supply	
17 VeeT Transmitter Ground (Common with Receiver Ground)	1
18 TD+ Transmitter Non-Inverted DATA in. AC Coupled.	
19 TD- Transmitter Inverted DATA in. AC Coupled.	
20 VeeT Transmitter Ground (Common with Receiver Ground)	1

#### Note


- 1. Circuit ground is internally isolated from chassis ground.
- $2. \ Laser output \ disabled \ on TX \ Disable > 2.0V \ or \ open, enabled \ on TX \ Disable < 0.8V.$
- 3. Should be pulled up with 4.7k 10kohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF (0) pulls line low to indicate module is plugged in.
- 4. LOS is open collector output. Should be pulled up with 4.7k 10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.



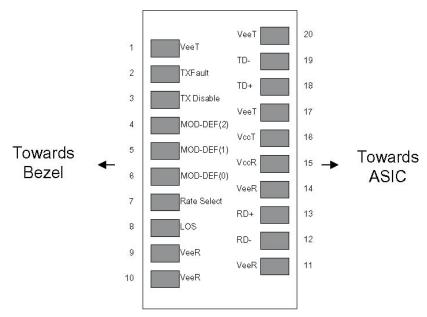

Pin-out of Connector Block on Host Board

#### **Recommend Circuit Schematic**

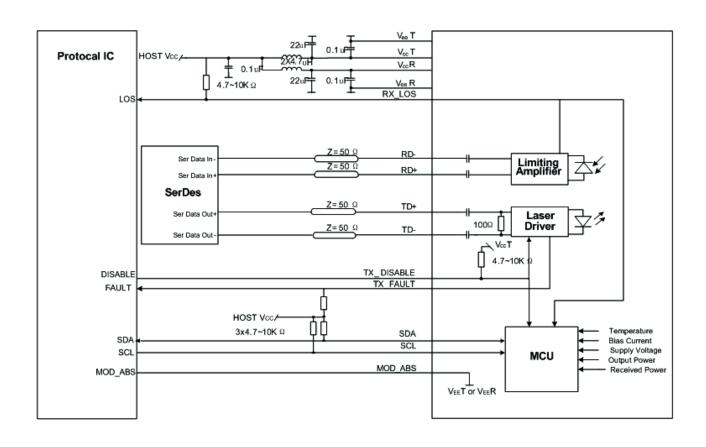



### **Absolute Maximum Ratings**

Parameter	Symbol	Min	Тур	Max	Unit	Ref.
Maximum Supply Voltage	Vcc	-0.5		+4.0	V	
Storage Temperature	TS	-40		+85	°C	
Operating Humidity	RH	0		85	%	

### **Recommended Operating Conditions**

Parameter	Symbol	Min	Тур	Max	Unit	Ref.
Power Supply Voltage	Vcc	3.13	3.30	3.47	V	
Power Supply Current	laa			250	mA	Commercial
	lcc			300	mA	Industrial
Case Operating Temperature	Tc	0		+70	°C	1
	TI	-40		+85	°C	2
Data Rate		0.614		3.072	Gbps	
9/125um G.652 SMF	Lmax			20	km	

Notes:

### Electrical Characteristics (TOP=25°C, Vcc=3.3Volts)

Parameter	Symbol	Min	Тур	Max	Unit	Ref.
Transmitter						
Input differential impedance	Rin		100		Ω	1
Single ended data input swing	Vin, pp	250		1200	mV	
TX Disable-High		Vcc -1.3		Vcc	V	
TX Disable-Low		Vee		Vee+ 0.8	V	
TX Fault-High		Vcc -0.5		Vcc	V	
TX Fault-Low		Vee		Vee+ 0.5	V	
Receiver						
Single ended data output swing	Vout, pp	300	400	800	mV	2
Data output rise time	tr			175	ps	3
Data output fall time	tf			175	ps	3
LOS-High		Vcc -0.5		Vcc	V	
LOS-Low		Vee		Vee+ 0.5	V	

Notes:

<sup>1.</sup> For commercial class product.

<sup>2.</sup>For industrial class product.

<sup>1.</sup> AC coupled.

<sup>2.</sup> Into 100 ohm differential termination.3. 20 – 80 %



#### Optical Characteristics (TOP=25°C, Vcc=3.3 Volts)

Parameter	Symbol	Min	Тур	Max	Unit	Ref.
Transmitter						
Output Opt. Power	РО	-5		0	dBm	1
Optical Wavelength	λ	1260	1310	1360	nm	
Spectral Width(-20dB)	Δλ			1	nm	
Side Mode Suppression Ratio	SMSR	30		-	dB	
Optical Rise/Fall Time	tr/tf			160	ps	2
Jitter Generation (RMS)				0.01	UI	
Jitter Generation (pk-pk)				0.1	UI	
Optical Extinction Ratio	ER	8.2			dB	
Receiver						
RX Sensitivity @3.072Gb/s	SENS			-17	dBm	3,4
Receiver Overload		0			dBm	
Optical Center Wavelength	λC	1430	1550	1580	nm	
LOS De-Assert	LOSD			-20	dBm	
LOS Assert	LOSA	-35			dBm	
LOS Hysteresis		0.5		5	dB	


#### Notes:

- 1.Class 1 Laser Safety.
- 2.Unfiltered, 20-80%.
- 3. Measured with conformance signals defined in FC-PI-2 Rev. 10.0 specifications.
- 4. Measured with PRBS 2<sup>7</sup>-1 at 10<sup>-12</sup> BER.

### **Mechanical Specifications**

• ATOP's Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA), dimensions are in mm.



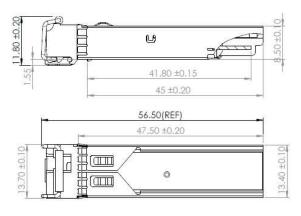



APSB35303xxL20



#### **EEPROM Information**

• EEPROM memory map specific data field description is as below:

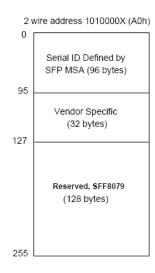

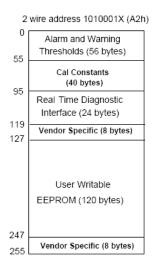

### Digital Diagnostic Monitoring Interface

Parameter	Range	Accuracy	Calibration
	0 to +70°C (C)		
Temperature	-40 to +85°C (I)	±3°C	Internal
Voltage	2.97 to 3.63V	±3%	Internal
Bias Current	0 to 100mA	±10%	Internal
TX Power	-5 to 0dBm	±3dB	Internal
RX Power	-17 to 0dBm	±3dB	Internal

Five transceiver parameter values are monitored. The following table defines the monitored parameter's accuracy.

### **Revision History**

Revision	Initiated	Reviewed	Approved	DCN	Release Date
Version1.0	Yangpeiyun	Sunbin	Dingzheng	New Released.	July 29, 2016



let's make it personal

atoptechnology.com